



**Bobcat**

*One Tough Animal*

SPECIFICATIONS

# DIESEL FORKLIFTS

9-Series, Pneumatic, 2.0 to 3.5-ton capacity



🌐 EMEA



# MAIN SPECIFICATIONS

# DIMENSIONS

TECHNICAL DATA ACCORDING TO VDI 2198							
	Unit	D20S-9	D25S-9	D30S-9	D33S-9	D35C-9	
<b>CHARACTERISTICS</b>							
1.3 Drive							diesel
1.4 Operator type							seated
1.5 Load capacity	Q	kg	2 000	2 500	3 000	3 250	3 500
1.6 Load center	c	mm			500		
1.8 Load distance: center of drive axle to fork	x	mm	480		485		495
1.9 Wheelbase	y	mm			1 700		
<b>WEIGHT</b>							
2.1 Service weight		kg	3 830	4 030	4 530	4 615	4 720
2.2 Axle loading, with load, front / rear		kg	4 977 / 853	5 724 / 806	6 518 / 1 012	6 892 / 973	7 302 / 918
2.3 Axle loading, without load, front / rear		kg	1 825 / 2 005	1 780 / 2 250	1 780 / 2 750	1 760 / 2 855	1 755 / 2 965
<b>TIRES</b>							
3.1 Rubber tires							superelastic, pneumatic
3.2 Tire size, front			7.00 × 15-12		8.15 × 15-12		250 × 15-18
3.3 Tire size, rear				6.50 × 10-10		6.50 × 10-12	
3.5 Wheels, number front / rear (x = driven wheels)					2x / 2		
3.6 Track width, front	b11	mm	975		982		1 026
3.7 Track width, rear	b12	mm			990		
<b>DIMENSIONS</b>							
4.1 Tilt of mast, fork carriage forward / backward	α/β	°			6 / 10		
4.2 Height mast lowered	h1	mm	2 190			2 180	
4.3 Free lift	h2	mm	147			152	
4.4 Lift	h3	mm		3 230			3 000
4.5 Height mast extended	h4	mm		4 490			4 260
4.7 Height of overhead guard	h6	mm			2 183		
4.8 Height of seat	h7	mm			1 026		
4.19 Overall length	l1	mm	3 624	3 674	3 779	3 798	3 828
4.20 Length to forkface	l2	mm	2 574	2 625	2 730	2 749	2 779
4.21 Overall width	b1/b2	mm	1 170		1 197		1 255
4.22 Fork dimensions	s/e/l	mm	40 × 100 × 1 050			45 × 125 × 1 050	
4.23 Fork carriage ISO 2328, class / type A, B			II			III	
4.24 Fork carriage width	b3	mm	1 103			1 115	
4.31 Ground clearance, with load, below mast	m1	mm	115			105	
4.32 Ground clearance, center of wheelbase	m2	mm			143		
4.34.1 Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	3 910	3 950	4 040	4 055	4 085
4.34.2 Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 110	4 150	4 240	4 255	4 285
4.35 Turning radius	Wa	mm	2 230	2 270	2 355	2 370	2 390
4.36 Internal turning radius	b13	mm	640			641.5	652.5
<b>PERFORMANCE DATA</b>							
5.1 Travel speed, with / without load		km/h	20 / 21		19 / 20		20 / 21
5.2 Lift speed, with / without load		mm/s	610 / 650	600 / 650	590 / 650	510 / 560	500 / 560
5.3 Lowering speed, with / without load		mm/s			510 / 450		
5.5 Drawbar pull, with / without load (@1.6 km/h)		kg	1 813 / 1 785	1 805 / 1 799	1 883 / 1 844	1 872 / 1 846	1 772 / 1 741
5.6 Max. drawbar pull, with / without load		kg	2 025 / 1 978	2 029 / 1999	2 124 / 2 057	2 113 / 2 060	1 989 / 1 931
5.7 Gradeability, with / without load (@1.6 km/h)		%	33.6 / 55.2	28.7 / 49.3	25.7 / 44.1	24.1 / 42.2	22.3 / 40.4
5.8 Max. gradeability, with / without load		%	38.1 / 63.5	32.5 / 52.5	29.3 / 50.5	27.4 / 48.1	25.2 / 45.7
5.10 Service brake							foot / hydraulic
<b>COMBUSTION ENGINE</b>							
7.1 Engine manufacturer / type							HDI / DM02VA
7.2 Engine power according to DIN ISO1585		kW			45.6		
7.3 Rated speed		min-1			2 200		
7.3.1 Torque at 1/min		Nm/rpm			300 / 1 200 – 1 400		
7.4 Number of cylinders, displacement		-/cm³			4 / 2 392		
7.5 Fuel consumption according to VDI Cycle		l/h	2.8	3.4	3.8	3.9	4
<b>ADDITIONAL DATA</b>							
8.2 Operating pressure for attachments		bar			156		
8.3 Oil flow for attachments		l/min			76.5		
8.4 Sound level at the driver's ear according to DIN 12 053		dB(A)			75		

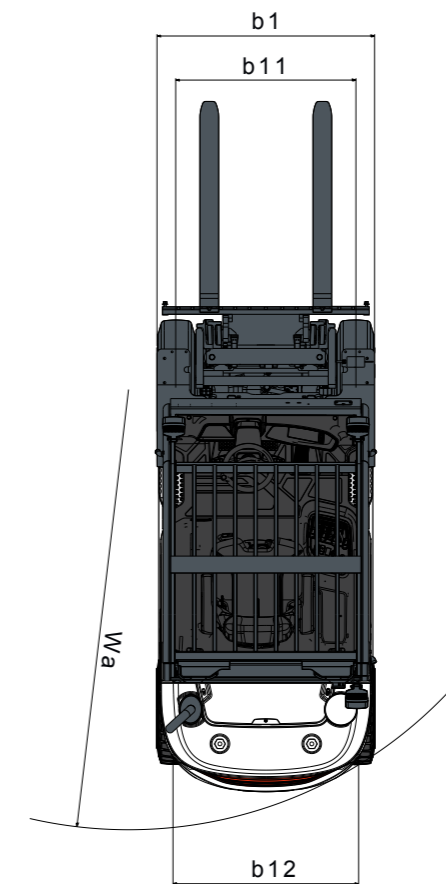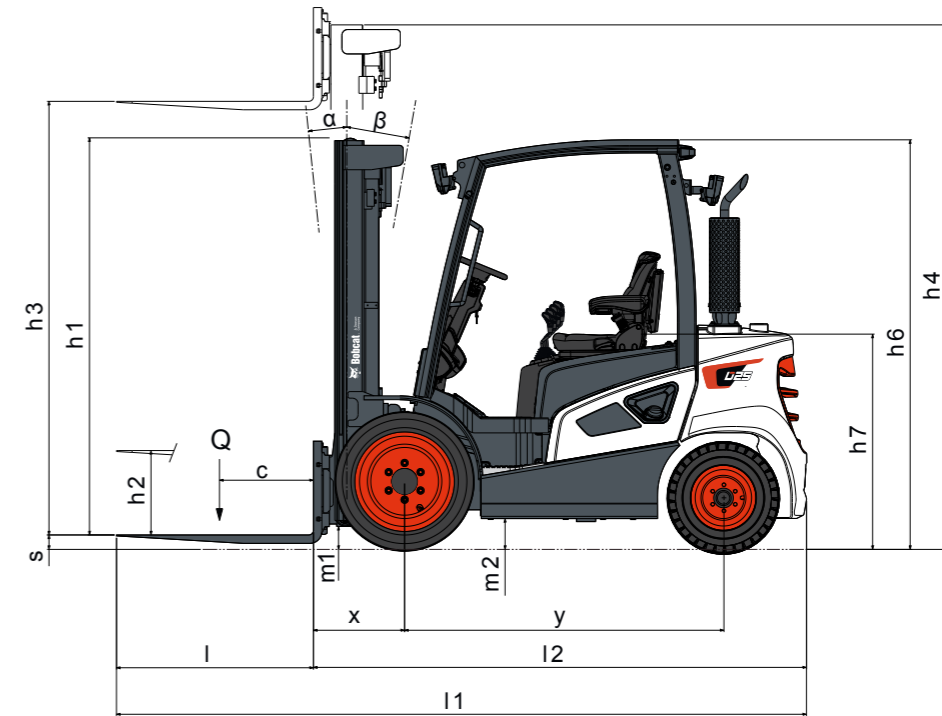

Note: Specification values quoted in this specification sheet have been rounded. Performance may vary depending on operating conditions. Products and specifications are subject to improvement and change without prior notice.

# MAST SPECIFICATIONS & RATED CAPACITIES

D20S-9															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 590	3 280	147	6	10	6	10	6	10	2 000	2 000	2 000		
	2 950	2 050	4 200	147	6	10	6	10	6	10	2 000	2 000	2 000		
	3 230	2 190	4 480	147	6	10	6	10	6	10	2 000	2 000	2 000		
	3 500	2 440	4 755	147	6	10	6	10	6	10	2 000	2 000	2 000		
	3 800	2 590	5 055	147	6	10	6	10	6	10	2 000	2 000	2 000		
	3 950	2 665	5 205	147	6	10	6	10	6	10	2 000	2 000	2 000		
	4 350	2 865	5 605	147	6	10	6	10	6	10	2 000	2 000	2 000		
	4 500	2 940	5 755	147	6	10	6	10	6	10	2 000	2 000	2 000		
	4 960	3 165	6 205	147	6	5	6	10	6	10	2 000	2 000	2 000		
	FF	2 950	2 050	4 200	845	6	10	6	10	6	10	2 000	2 000	2 000	
3 230		2 190	4 480	985	6	10	6	10	6	10	2 000	2 000	2 000		
3 600		2 440	4 855	1 235	6	10	6	10	6	10	2 000	2 000	2 000		
FFT	2 950	1 600	4 210	395	6	8	6	8	6	8	2 000	2 000	2 000		
	3 900	1 915	5 155	710	6	8	6	8	6	8	2 000	2 000	2 000		
	4 240	2 025	5 485	820	6	8	6	8	6	8	2 000	2 000	2 000		
	4 290	2 050	5 560	845	6	8	6	8	6	8	2 000	2 000	2 000		
	4 730	2 190	5 980	985	6	8	6	8	6	8	2 000	2 000	2 000		
	4 805	2 215	6 055	1 010	6	8	6	8	6	8	2 000	2 000	2 000		
	4 930	2 290	6 180	1 085	6	5	6	8	6	8	2 000	2 000	2 000		
	5 110	2 390	6 355	1 185	6	5	6	8	6	8	2 000	2 000	2 000		
	5 170	2 360	6 420	1 155	6	5	6	8	6	8	1 900	2 000	2 000		
	5 560	2 540	6 805	1 335	6	3	6	8	6	8	1 750	2 000	2 000		
	6 010	2 690	7 255	1 485	6	3	6	8	6	5	1 450	1 975	2 000		
	6 290	2 860	7 540	1 655	6	3	6	8	6	5	1 150	1 925	1 850		
	6 500	2 930	7 750	1 725	6	3	6	8	6	3	1 000	1 950	2 000		
	6 910	3 065	8 155	1 860	6	3	6	8	6	3	825	1 875	1 600		
	7 060	3 190	8 305	1 985	6	3	6	5	6	3	800	1 850	1 500		
	7 360	3 290	8 605	2 085	6	3	6	5	6	3	650	1 775	1 275		
	7 510	3 340	8 755	2 135	6	3	6	5	6	3	600	1 650	1 200		
	7 810	3 440	9 055	2 235	6	3	6	3	6	3	500	1 750	1 025		
	QUAD	6 100	2 190	7 355	985	6	3	6	5	6	5	1 275	1 550	1 600	
		6 640	2 390	7 895	1 185	6	3	6	5	6	5	925	1 475	1 525	
7 035		2 490	8 295	1 285	6	3	6	5	6	3	725	1 400	1 475		
7 945		2 820	9 200	1 615	6	3	6	5	6	3	450	1 275	1 050		
8 250		2 930	9 500	1 725	6	3	6	5	6	3	400	1 100	900		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

# MAST SPECIFICATIONS & RATED CAPACITIES

D25S-9															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 590	3 280	147	6	10	6	10	6	10	2 500	2 500	2 500		
	2 950	2 050	4 200	147	6	10	6	10	6	10	2 500	2 500	2 500		
	3 230	2 190	4 480	147	6	10	6	10	6	10	2 500	2 500	2 500		
	3 500	2 440	4 755	147	6	10	6	10	6	10	2 500	2 500	2 500		
	3 800	2 590	5 055	147	6	10	6	10	6	10	2 500	2 500	2 500		
	4 500	2 940	5 755	147	6	5	6	10	6	10	2 500	2 500	2 500		
	4 960	3 165	6 205	147	6	5	6	10	6	10	2 500	2 500	2 500		
	FF	2 950	2 050	4 200	845	6	10	6	10	6	10	2 500	2 500	2 500	
		3 230	2 190	4 480	985	6	10	6	10	6	10	2 500	2 500	2 500	
		3 600	2 440	4 855	1 235	6	10	6	10	6	10	2 500	2 500	2 500	
FFT	2 950	1 600	4 210	395	6	8	6	8	6	8	2 500	2 500	2 500		
	3 900	1 915	5 155	710	6	8	6	8	6	8	2 500	2 500	2 500		
	4 240	2 025	5 485	820	6	8	6	8	6	8	2 500	2 500	2 500		
	4 290	2 050	5 560	845	6	8	6	8	6	8	2 500	2 500	2 500		
	4 730	2 190	5 980	985	6	8	6	8	6	8	2 500	2 500	2 500		
	4 805	2 215	6 055	1 010	6	8	6	8	6	8	2 500	2 500	2 500		
	4 930	2 290	6 180	1 085	6	5	6	8	6	8	2 250	2 500	2 500		
	5 110	2 390	6 355	1 185	6	3	6	8	6	8	2 150	2 475	2 500		
	5 170	2 360	6 420	1 155	6	3	6	8	6	8	2 000	2 450	2 500		
	5 560	2 540	6 805	1 335	6	3	6	8	6	5	1 750	2 400	2 500		
	6 010	2 690	7 255	1 485	6	3	6	8	6	3	1 300	2 300	2 425		
	6 290	2 860	7 540	1 655	6	3	6	8	6	3	1 100	2 250	2 150		
	6 500	2 930	7 750	1 725	6	3	6	5	6	3	1 000	2 200	1 925		
	6 910	3 065	8 155	1 860	6	3	6	3	6	3	800	2 150	1 550		
	7 060	3 190	8 305	1 985	6	3	6	3	6	3	700	2 100	1 425		
	7 360	3 290	8 605	2 085	6	3	6	3	6	3	600	2 050	1 225		
	7 510	3 340	8 755	2 135	6	3	6	3	6	3	550	1 975	1 125		
	7 810	3 440	9 055	2 235	6	3	6	3	6	3	400	1 725	950		
	QUAD	6 100	2 190	7 355	985	6	3	6	5	6	3	1 175	2 000	2 075	
		6 640	2 390	7 895	1 185	6	3	6	5	6	3	825	1 925	1 850	
7 035		2 490	8 295	1 285	6	3	6	5	6	3	650	1 850	1 475		
7 945		2 820	9 200	1 615	6	3	6	5	6	3	375	1 325	925		
8 250		2 930	9 500	1 725	6	3	6	3	6	3	300	1 450	775		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

# MAST SPECIFICATIONS & RATED CAPACITIES

D30S-9															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 580	3 280	152	6	10	6	10	6	10	3 000	3 000	3 000		
	2 950	2 040	4 200	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 230	2 180	4 480	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 500	2 430	4 755	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 800	2 580	5 055	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 950	2 655	5 205	152	6	10	6	10	6	10	3 000	3 000	3 000		
	4 350	2 855	5 605	152	6	8	6	10	6	10	3 000	3 000	3 000		
	4 500	2 930	5 755	152	6	5	6	10	6	10	3 000	3 000	3 000		
	4 960	3 155	6 205	152	6	3	6	10	6	10	2 750	3 000	3 000		
	FF	2 950	2 040	4 200	840	6	10	6	10	6	10	3 000	3 000	3 000	
3 230		2 180	4 480	980	6	10	6	10	6	10	3 000	3 000	3 000		
3 600		2 430	4 855	1 230	6	10	6	10	6	10	3 000	3 000	3 000		
FFT	2 950	1 590	4 210	390	6	8	6	8	6	8	3 000	3 000	3 000		
	3 900	1 905	5 155	705	6	8	6	8	6	8	3 000	3 000	3 000		
	4 240	2 015	5 485	815	6	8	6	8	6	8	3 000	3 000	3 000		
	4 290	2 040	5 560	840	6	8	6	8	6	8	3 000	3 000	3 000		
	4 730	2 180	5 980	980	6	3	6	8	6	8	3 000	3 000	3 000		
	4 805	2 205	6 055	1 005	6	3	6	8	6	8	3 000	3 000	3 000		
	4 930	2 280	6 180	1 080	6	3	6	8	6	8	2 650	3 000	3 000		
	5 110	2 380	6 355	1 180	6	3	6	8	6	8	2 500	3 000	3 000		
	5 170	2 350	6 420	1 150	6	3	6	8	6	8	2 300	3 000	3 000		
	5 560	2 530	6 805	1 330	6	3	6	8	6	5	2 000	2 975	3 000		
	6 010	2 680	7 255	1 480	6	3	6	5	6	3	1 500	2 850	2 950		
	6 290	2 850	7 540	1 650	6	3	6	5	6	3	1 200	2 800	2 600		
	6 500	2 920	7 750	1 720	6	3	6	5	6	3	1 250	2 750	2 300		
	6 910	3 055	8 155	1 855	6	3	6	3	6	3	825	2 650	1 800		
	7 060	3 180	8 305	1 980	6	3	6	3	6	3	750	2 600	1 650		
	7 360	3 280	8 605	2 080	6	3	6	3	6	3	625	2 200	1 375		
	7 510	3 330	8 755	2 130	6	3	6	3	6	3	550	2 050	1 275		
	7 810	3 430	9 055	2 230	6	3	6	3	6	3	450	1 800	1 075		
	QUAD	6 100	2 180	7 350	980	6	3	6	5	6	5	1 475	2 475	2 500	
		6 640	2 380	7 890	1 180	6	3	6	5	6	3	1 100	2 350	2 425	
7 035		2 480	8 290	1 280	6	3	6	3	6	3	875	2 275	1 975		
7 945		2 810	9 195	1 610	-	-	-	-	-	-	450	-	-		
8 250		2 920	9 495	1 720	-	-	6	5	-	-	-	-	-		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

# MAST SPECIFICATIONS & RATED CAPACITIES

D33S-9															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 580	3 280	152	6	10	6	10	6	10	3 250	3 250	3 250		
	2 950	2 040	4 200	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 230	2 180	4 480	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 500	2 430	4 755	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 800	2 580	5 055	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 950	2 655	5 205	152	6	10	6	10	6	10	3 250	3 250	3 250		
	4 350	2 855	5 605	152	6	5	6	10	6	10	3 250	3 250	3 250		
	4 500	2 930	5 755	152	6	5	6	10	6	10	3 100	3 250	3 250		
	4 960	3 155	6 205	152	6	3	6	10	6	8	2 700	3 250	3 250		
	FF	2 950	2 040	4 200	840	6	10	6	10	6	10	3 250	3 250	3 250	
3 230		2 180	4 480	980	6	10	6	10	6	10	3 250	3 250	3 250		
3 600		2 430	4 855	1 230	6	10	6	10	6	10	3 250	3 250	3 250		
FFT	2 950	1 590	4 210	390	6	8	6	8	6	8	3 250	3 250	3 250		
	3 900	1 905	5 155	705	6	8	6	8	6	8	3 250	3 250	3 250		
	4 240	2 015	5 485	815	6	8	6	8	6	8	3 250	3 250	3 250		
	4 290	2 040	5 560	840	6	8	6	8	6	8	3 250	3 250	3 250		
	4 730	2 180	5 980	980	6	3	6	8	6	8	3 150	3 250	3 250		
	4 805	2 205	6 055	1 005	6	3	6	8	6	8	3 000	3 250	3 250		
	4 930	2 280	6 180	1 080	6	3	6	8	6	8	2 600	3 250	3 250		
	5 110	2 380	6 355	1 180	6	3	6	8	6	8	2 500	3 200	3 250		
	5 170	2 350	6 420	1 150	6	3	6	8	6	8	2 250	3 175	3 150		
	5 560	2 530	6 805	1 330	6	3	6	8	6	5	2 000	3 075	3 200		
	6 010	2 680	7 255	1 480	6	3	6	5	6	3	1 600	2 975	3 050		
	6 290	2 850	7 540	1 650	6	3	6	3	6	3	1 250	2 900	2 575		
	6 500	2 920	7 750	1 720	6	3	6	3	6	3	1 200	2 850	2 250		
	6 910	3 055	8 155	1 855	6	3	6	3	6	3	900	2 750	1 750		
	7 060	3 180	8 305	1 980	6	3	6	3	6	3	850	2 550	1 600		
	7 360	3 280	8 605	2 080	6	3	6	3	6	3	650	2 200	1 350		
	7 510	3 330	8 755	2 130	6	3	6	3	6	3	600	2 050	1 225		
	7 810	3 430	9 055	2 230	6	3	6	3	6	3	550	1 750	1 025		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

# MAST SPECIFICATIONS & RATED CAPACITIES

D35C-9															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD	LC 500 mm		
			mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg
STD	1 800	1 580	3 050	152	6	10	6	10	6	10	3 500	3 500	3 500		
	2 350	1 855	3 600	152	6	10	6	10	6	10	3 500	3 500	3 500		
	2 720	2 040	3 970	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 000	2 180	4 250	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 495	2 430	4 750	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 655	2 580	4 905	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 805	2 655	5 055	152	6	10	6	10	6	10	3 500	3 500	3 500		
	4 205	2 855	5 455	152	6	8	6	10	6	10	3 500	3 425	3 500		
	4 805	3 155	6 055	152	6	3	6	10	6	8	3 250	3 250	3 350		
	5 300	3 555	6 555	152	6	3	6	10	6	5	2 500	3 125	3 225		
FF	2 350	1 855	3 600	655	6	10	6	10	6	10	3 500	3 500	3 500		
	2 720	2 040	3 970	840	6	10	6	10	6	10	3 500	3 500	3 500		
	3 000	2 180	4 250	980	6	10	6	10	6	10	3 500	3 500	3 500		
	3 495	2 430	4 745	1 230	6	10	6	10	6	10	3 500	3 500	3 500		
	3 555	1 905	4 805	705	6	8	6	8	6	8	3 400	3 400	3 400		
FFT	3 960	2 040	5 210	840	6	8	6	8	6	8	3 400	3 400	3 400		
	4 380	2 180	5 630	980	6	5	6	8	6	8	3 400	3 350	3 400		
	4 580	2 280	5 830	1 080	6	3	6	8	6	8	3 350	3 275	3 400		
	4 820	2 350	6 070	1 150	6	3	6	8	6	8	3 250	3 225	3 325		
	5 205	2 530	6 455	1 330	6	3	6	8	6	5	2 800	3 125	3 225		
	5 655	2 680	6 905	1 480	6	3	6	5	6	3	2 200	3 000	3 125		
	6 150	2 920	7 400	1 720	6	3	6	3	6	3	1 600	2 900	2 700		
	6 555	3 055	7 805	1 855	6	3	6	3	6	3	1 200	2 825	2 050		
6 900	3 245	8 150	2 045	6	3	6	3	6	3	900	2 750	1 625			

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

