



WAREHOUSE EQUIPMENT

Pallet Trucks - Stackers - Order Pickers - Reach Trucks



Leading the way

The new world class warehouse equipment continue to follow the core Doosan tradition of delivering simple, powerful performance, whilst most of all, delivering the best possible value for our customers.

Building rugged and reliable, yet simple machines, has allowed us to become a leading provider of material handling equipment. By adding high specification features and proven technology, our aim is to increase your productivity whilst lowering equipment lifetime costs.

All our premium products deserve to carry the label "Made in Germany" and our specialist teams ensure the highest quality of our products at each stage of the manufacturing process. Thanks to an improved durable design, Doosan's new warehouse equipment exceeds the highest demands for safe operation.

“ Higher lifting and travel speed helps me to complete my job efficiently ”

PRODUCTIVITY

- Easy pallet entry/exit
- Proportional valve for lifting and lowering
- Roll out battery



“ The robustness of Doosan gets the toughest of jobs done ”

RELIABILITY


- Robust construction
- Reliable AC power
- Combined bearings



“ The Doosan service support network has never let me down ”

SERVICEABILITY


- Doosan service network coverage
- Quick service response

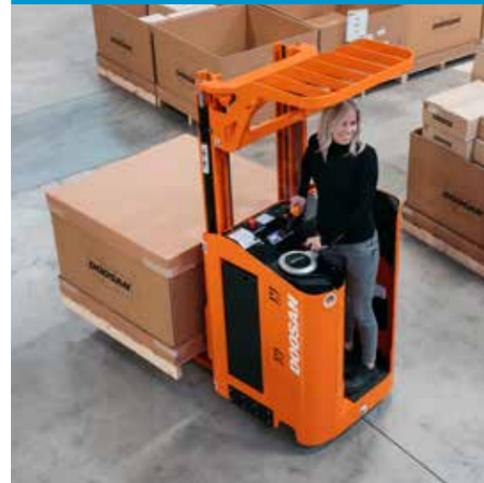


“ With the reassuring features of Doosan equipment, operation is safe and comfortable ”

SAFETY AND ERGONOMICS

- Ergonomically designed tiller arm
- Emergency stop
- Turtle mode

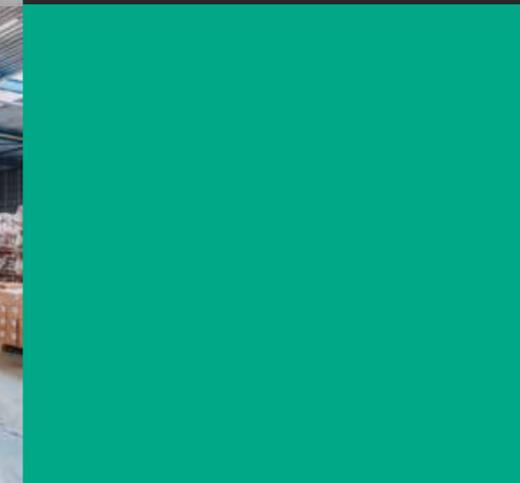

Our Assets

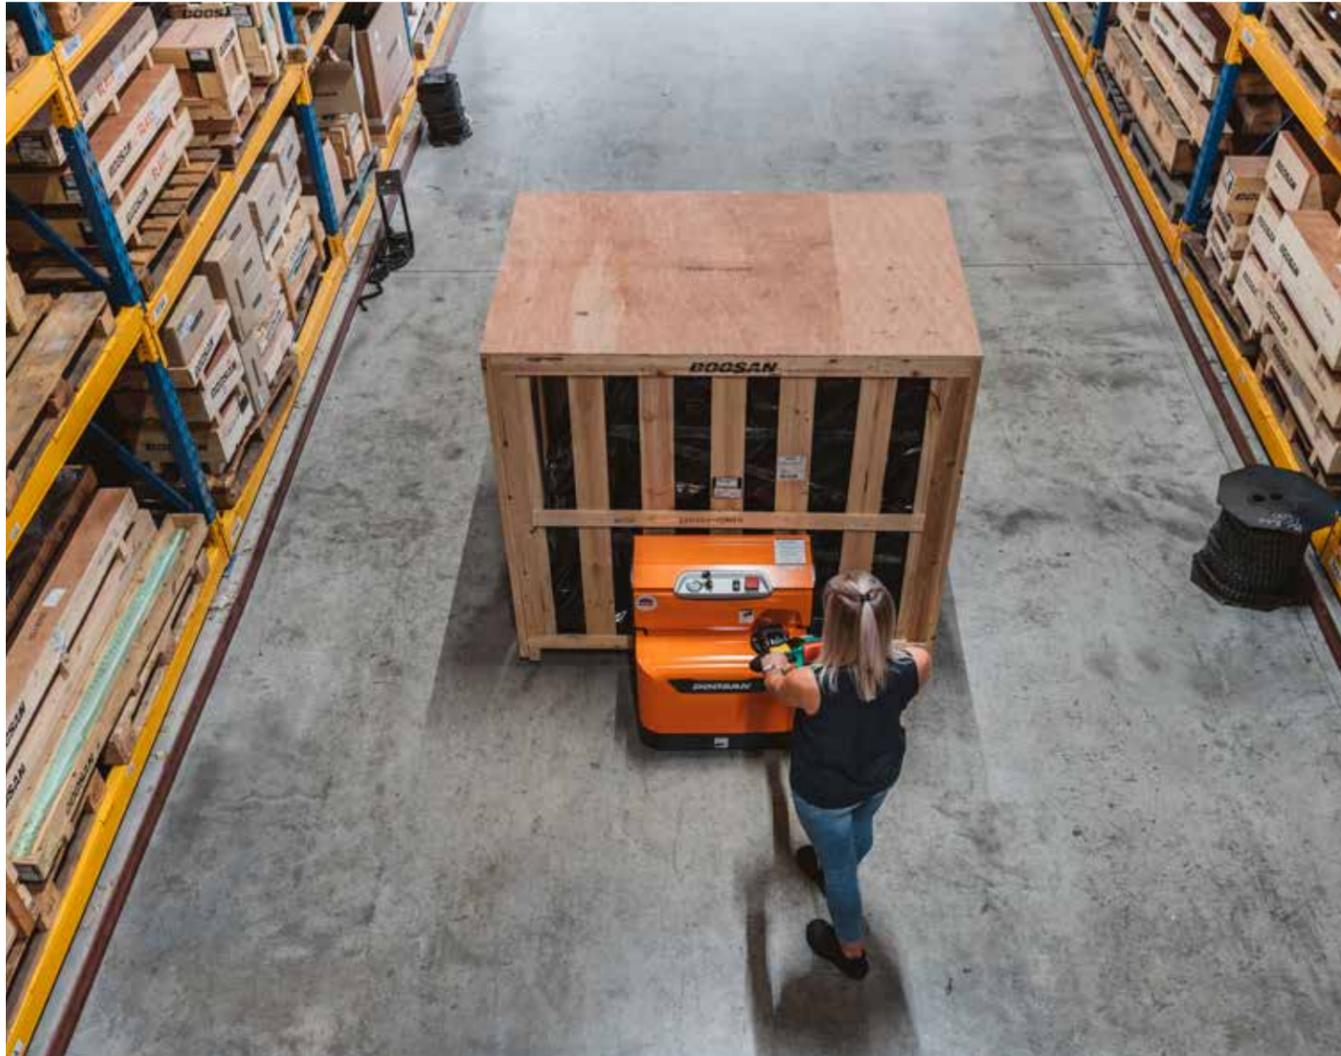

Productivity



Override upright tiller arm lock

Override button allows the operator to drive the machine with tiller arm in upright position.



Roll out battery (stackers, heavy line)

Nylon rollers allow the battery to be removed with little effort, making battery exchange simple and safe.



Easy pallet entry/exit

Contoured fork design and tandem load wheels allow for easy entry and exit of palletised loads.

Reliability



Proportional valve for lifting and lowering

Incremental lifting and lowering speed ensures smooth operating and safeguards the load.



Compact design

Compact and stable chassis for maximum manoeuvrability, even in the tightest of spaces, operators can comfortably operate the pallet truck safely.



AC Power

Fully programmable performance parameters give total customization of acceleration, top speed and braking.



Robust construction

Our heavy duty construction utilizes thick plastic and a metal top cover, ensuring minimal damage, thus lowering lifetime costs. This low total cost of ownership makes our warehouse range perfect for even the toughest applications.



It's a Doosan

The world's leading value forklift truck brand and the only major manufacturer to offer two leading ranges of trucks – the high spec 7-Series and economy GX series.



Combined bearings

All stackers are fitted with combined bearing to increase the reliability and precision.

Ergonomics



Clear instrumentation

Easy-to-read instrument panel, displays all key truck parameters and settings.



Tiller control

Ergonomically designed tiller arm with dual butterfly switches, facilitating use by right or left handed operators. Integrated turtle buttons restricts travel speed when manoeuvring in tighter areas.

Safety



Emergency stop

Large button with 'push away' safety function, safeguarding users when operating the pallet truck.

Application



Cold store protection

Most of our machines can be used in freezers up to -30°C (optional). The trucks are equipped with a special frame coating, stainless steel axes and bolts, greasable cross-bearings with a special lubricant, special hydraulic oil and a magnetic brake heating system.



Skilful weight loader

Transport goods up to 5 ton with our wide range of pallet trucks. It is possible to add side or rear protection, which maximizes the operator's safety.


Compact design

Our compact stacker line is ideally suited for warehouses with small corridors. The compact, but excellent maneuverability allows you to design the most efficient warehouse lay-out. The compact stacker line enhances your productivity, even in the tightest spaces.



Heavy lifting

Our heavy stacker line is ideal to lift heavier loads, up to 5.4m. The robust and stable chassis guarantees effective and reliable operation.

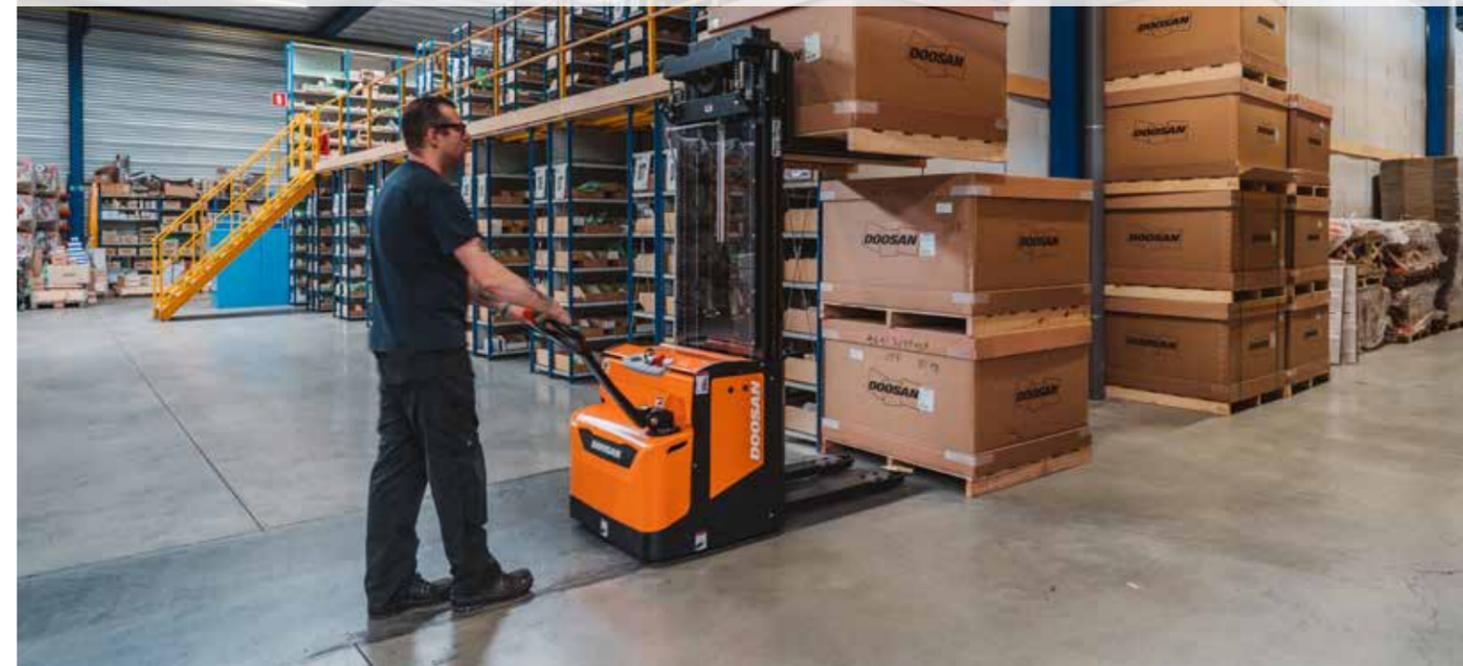

Product Range

Model		Capacity (kg)	
PALLET TRUCKS			
Manual pallet truck			
HPT		2,500	
Economy Line (lithium)			
LPM15N-7	LPM20N-7	1,500	2,000
Electric pallet truck (lead-acid)			
BPL18S-7	BPL20S-7	1,800	2,000
BPM20S-7		2,000	
BPR20S-7		2,000	
BPM40S-5	BPM50S-5	4,000	5,000
BPW20S-5		2,000	

STACKERS			
Economy Line			
LSM12N-7		1,200	
BSL12N-7	BSL16N-7	1,200	1,600
Compact Line			
BSL10S-7C	BSL13S-7C	1,000	1,250
Heavy Line			
BSL14S-7	BSL16S-7	BSL20S-7	1,400
BSR16S-7		1,600	
BSW13S-5		1,250	
Double Stackers			
BDL13S-7	BDL13S-7H	1,250/1,800 (top forks/total)	1,250/2,000 (top forks/total)
BDR13S-7		1,250/2,000 (top forks/total)	
BDW13S-5		1,250/2,000 (top forks/total)	

ORDER PICKERS			
BOR20S-5X		2,000	

CARGO HANDLING SOLUTIONS			
LEHF75D		7,500	

REACH TRUCKS			
BR14JW-7 Plus	BR16JW-7 Plus	1,400	1,600

MAXIMUM PRODUCTIVITY

Easy pallet entry/exit

Proportional valve for lifting and lowering

Roll out battery

Override upright tiller arm lock

OPTIMAL ERGONOMICS

Easy to read instrument panel

Ergonomically designed tiller arm

GREAT SERVICEABILITY

Worldwide service network

Doosan genuine parts

SAFETY

Great stability

Turtle mode

Emergency stop

EXCELLENT RELIABILITY

Robust construction

Combined bearings (only for stackers)

AC Power



Pallet Trucks

No matter what products, pallets or loads you need to transport, Doosan has the perfect solution for you. With our durable pallet trucks, you can transport loads up to 5 tons. Furthermore, you can maximize productivity, whilst maintaining your operator's safety. You can choose from a fold-down platform or a side panel.



- Capacity
- Lift height
- Overall width



HPT - Hand Pallet Truck

- 2,500 kg
- 200 mm
- 520 mm



LPM15/20N-7

- 1,500 - 2,000 kg
- 115 mm
- 540 mm
- Pedestrian
Centre Drive Unit



BPL18/20S-7

- 1,800 / 2,000 kg
- 120 mm
- 660 mm
- Pedestrian
Off-Set Drive Unit



BPM20S-7

- 2,000 kg
- 120 mm
- 660 mm
- Pedestrian
Centre Drive Unit



BPR20S-7

- 2,000 kg
- 120 mm
- 700 mm
- Ride-on Platform,
Centre Drive Unit



BPM40/50S-5

- 4,000 / 5,000 kg
- 120 mm
- 690 mm
- Pedestrian,
Centre Drive Unit



BPW20S-5

- 2,000 kg
- 115 mm
- 800 mm
- Stand-in

Standard Features and Optional Extras


- Standard
- Option

Low noise and maintenance-free AC motors		Integrated charger*	
Regenerative braking system		Different energy packages based on your application	
Energy saving and sensitive proportional hydraulic system*		Different models of drive tire*	
Multi-functional display to monitor energy and machine status		Various fork dimensions (length and width)	
Keypad		Cold store protection down to -30°C*	
Override button allows control over the pallet truck, even when the tiller arm is in the vertical position*		Stainless steel axle and bolts*	
Turtle speed button*		Steel cover*	
Tandem Vulkollan™ load wheels*			
Large Vulkollan™ drive wheel			

Only applicable to electric lead-acid pallet trucks.
* applicable only to certain models

Stackers

The stackers product range is divided into three main categories, depending on manoeuvrability, lifting height and functionality.

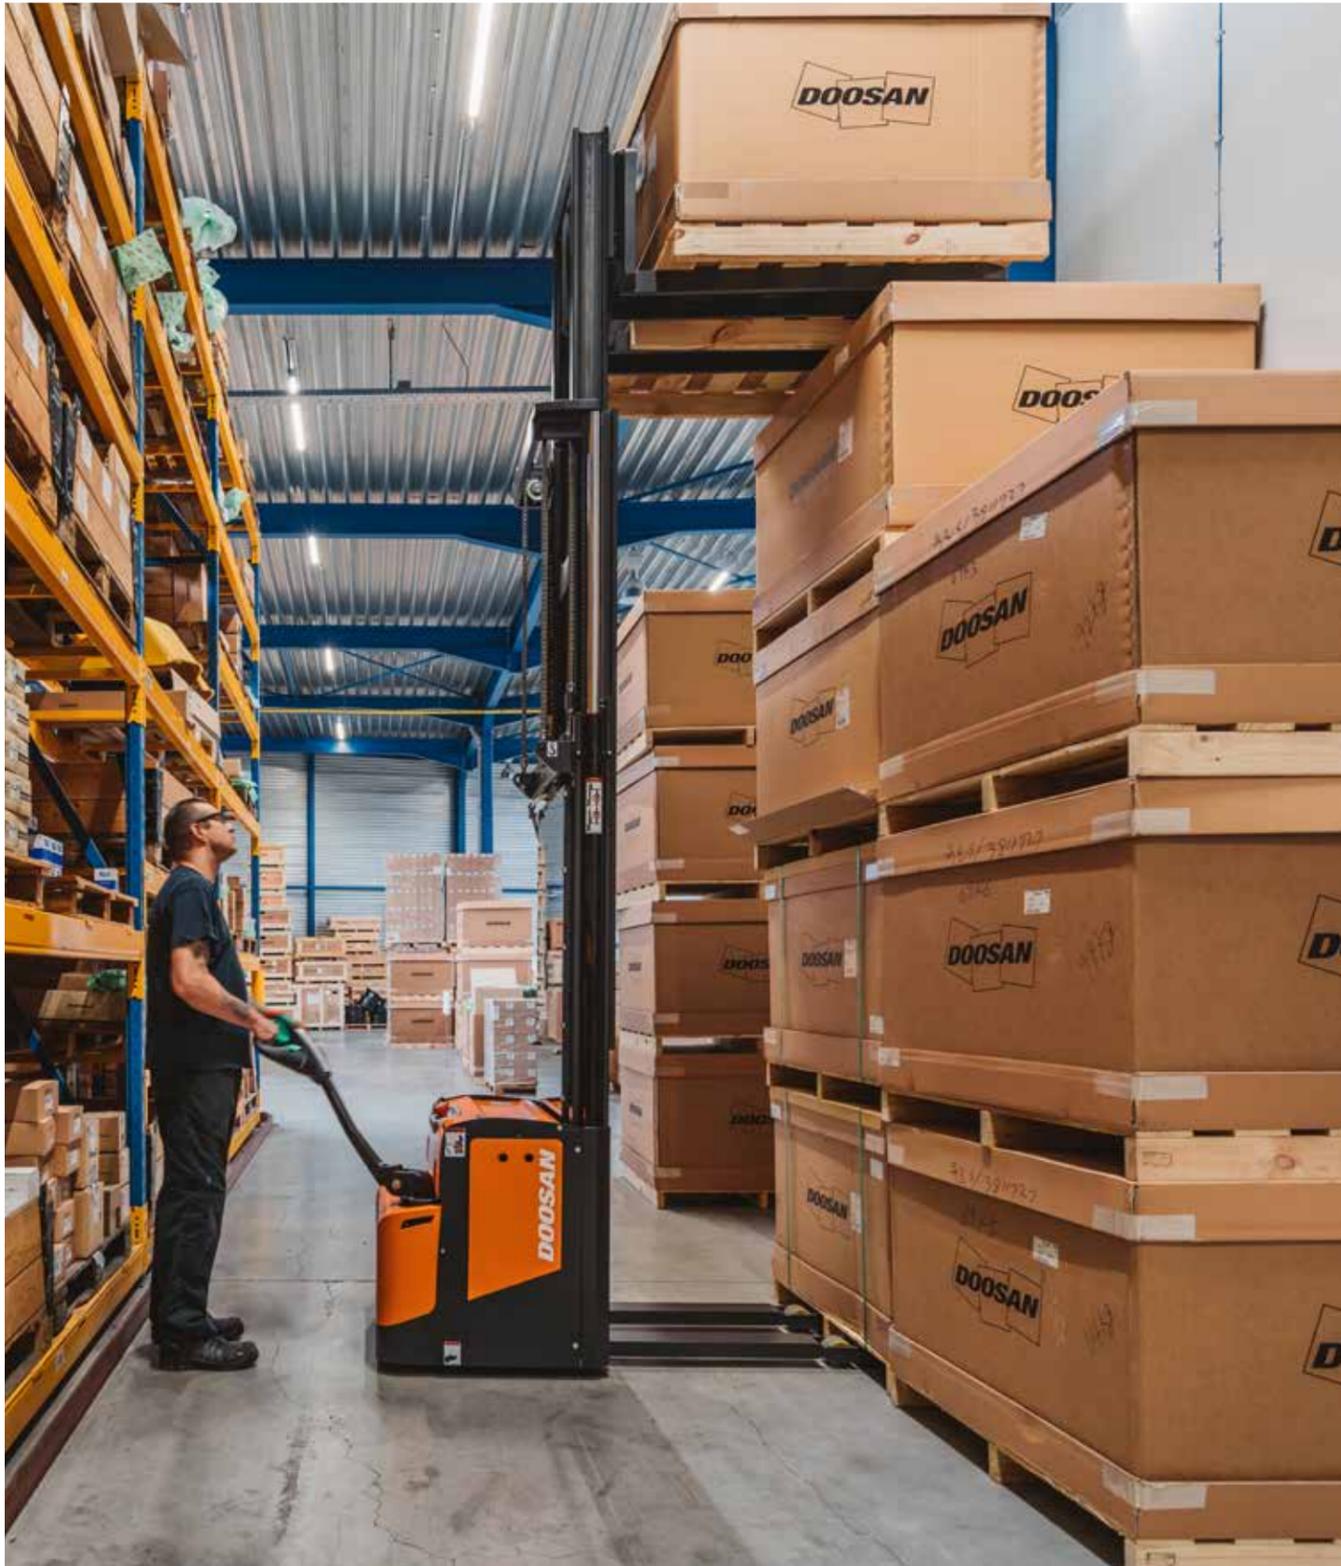

- Capacity
- Lift height
- Overall width

ECONOMY LINE

Ideal for less demanding applications.



LSM12N-7

- 1,200 kg
- 1,930 - 2,330 mm
- 800 mm



BSL12/16N-7

- 1,200 / 1,600 kg
- 1,958 - 2,408 mm
- 800 mm

COMPACT LINE

Has a narrow chassis, which makes it ideally suited to operate in tight conditions.



BSL10/13S-7C

- 1,000 / 1,250 kg
- 1,790 - 3,590 mm
- 660 mm

HEAVY LINE

Is designed to provide a more stable structure, perfectly suitable to lift loads up to 5.4m.



BSL14/16S-7

- 1,400 / 1,600 kg
- 2,890 - 5,390 mm
- 790 mm



BSR16S-7

- 1,600 kg
- 2,890 - 4,790 mm
- 787 mm



BSL20S-7

- 2,000 kg
- 2,890 - 5,390 mm
- 880 mm



BSW13S-5

- 1,250 kg
- 2,890 mm
- 800 mm

DOUBLE STACKERS

Productivity can be doubled, thanks to our range of double stackers.



BDL13S-7
BDL13S-7H

- 1,250 / 1,800 kg
- 1,250 / 2,000 kg
- 690 - 2,490 mm
- 660 mm



BDR13S-7

- 1,250 / 2,000 kg
- 1,790 - 2,090 mm
- 700 mm



BDW13S-5

- 1,250 / 2,000 kg
- 1,790 mm
- 800 mm

▶ only for BSL16N-7
▲ only for BDL13S-7

Standard Features and Optional Extras

- Standard
- Option

Low noise and maintenance-free AC motors	
Regenerative braking system	
Energy saving and sensitive proportional hydraulic system	
Multi-functional display to monitor energy and machine status	
Keypad	
Turtle speed button*	
Shock-free lowering of load using a hydraulic damper*	
Electrical/mechanical steering	
Battery Roll-in/Roll-out system*	
Tandem Vulkollan™ load wheels*	
Large Vulkollan™ drive wheel*	

Integrated charger*	
Different energy packages based on your application	
Cold store protection down to -30°C*	
Stainless steel axle and bolts*	
Trolley for battery Roll-in/Roll-out system*	
Steel cover*	

Only applicable to premium range.
* applicable only to certain models

Order Pickers

For each order picking application, Doosan offers a well-equipped machine to help you increase your productivity. The order picker with scissor-lift offers the flexibility to raise the forks to the optimal working height.

-  Capacity
-  Lift height
-  Overall width
-  Fork length



BOR20S-5X

-  2,000 kg
-  700 mm
-  765 mm
-  2,350 mm

Standard Features and Optional Extras

- Standard
- Option

Low noise and maintenance-free AC motors	
Electrical power steering	
Regenerative braking system	
Energy saving and sensitive proportional hydraulic system	
Multi-functional display to monitor energy and machine status	
Keypad	
Battery Roll-in/Roll-out system	
Tandem Vulkollan™ load wheels	
Large Vulkollan™ drive wheel	

Different energy packages based on your application	
Various fork lengths	
Cold store protection down to -30°C	

Options



Forks


Doosan offers a wide range of forks for pallet trucks.



520 mm
EPAL/Europallet
685 mm
CHEP-pallet



1,150 mm
EPAL/Europallet
800 mm
EPAL/Europallet sideways
910 mm
EPAL/Europallet sideways
1,000 mm
CHEP-pallet
1,220 mm
Heavy loads

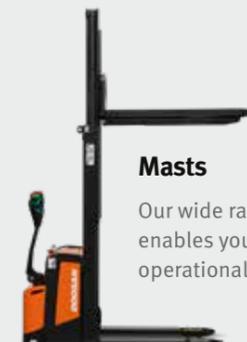

Masts

Our wide range of masts for stackers enables you to fit perfectly your operational needs.

Description
FORKS
Forks 800 / 540 mm
Forks 800 / 685 mm
Forks 915 / 540 mm
Forks 915 / 685 mm
Forks 980 / 520 mm
Forks 980 / 680 mm
Forks 1,000 / 540 mm
Forks 1,000 / 685 mm
Forks 1,150 / 520 mm
Forks 1,150 / 540 mm
Forks 1,150 / 570 mm
Forks 1,150 / 650 mm
Forks 1,150 / 680 mm
Forks 1,150 / 685 mm
Forks 1,190 / 580 mm
Forks 1,190 / 680 mm
Forks 1,195 / 520 mm
Forks 1,195 / 570 mm
Forks 1,195 / 680 mm
Forks 1,220 / 540 mm
Forks 1,220 / 685 mm
Forks 2,350 / 570 mm
Forks 2,390 / 540 mm
MASTS
Standard (STD), 690 mm
Standard (STD), 1,600 mm
Standard (STD), 1,790 mm
Standard (STD), 2,000 mm
Standard (STD), 2,090 mm
Standard (STD), 2,490 mm
Standard (STD), 2,890 mm
Standard (STD), 2,900 mm
Standard (STD), 2,920 mm
Standard (STD), 3,200 mm
Standard (STD), 3,220 mm
Standard (STD), 3,290 mm
Standard (STD), 3,590 mm
Standard (STD), 3,600 mm
Standard (STD), 3,620 mm

Description	Pallet Trucks						Stackers						Double Stackers			Order Pickers	
	LPM15/20N-7	BPL18/20S-7	BPM20S-7	BPR20S-7	BPM40/50S-5	BPW20S-5	LSM12N-7	BSL12/16N-7	BSL10/13S-7C	BSL14/16S-7	BSR16S-7	BSL20S-7	BSW13S-5	BDL13S-7(H)	BDR13S-7	BDW13S-5	BOR20S-5X
FORKS	■																
Forks 800 / 540 mm	■																
Forks 800 / 685 mm	■																
Forks 915 / 540 mm	■																
Forks 915 / 685 mm	■																
Forks 980 / 520 mm		■	■	■													
Forks 980 / 680 mm		■	■	■													
Forks 1,000 / 540 mm	■																
Forks 1,000 / 685 mm	■																
Forks 1,150 / 520 mm		■	■	■		■											
Forks 1,150 / 540 mm	■																
Forks 1,150 / 570 mm	■						■	■									
Forks 1,150 / 650 mm																	
Forks 1,150 / 680 mm				■													
Forks 1,150 / 685 mm	■						■	■									
Forks 1,190 / 580 mm					■												
Forks 1,190 / 680 mm				■													
Forks 1,195 / 520 mm		■	■														
Forks 1,195 / 570 mm		■	■						■	■	■	■	■	■	■	■	■
Forks 1,195 / 680 mm		■	■														
Forks 1,220 / 540 mm	■																
Forks 1,220 / 685 mm	■																
Forks 2,350 / 570 mm																	■
Forks 2,390 / 540 mm						■											
MASTS																	
Standard (STD), 690 mm																	○
Standard (STD), 1,600 mm							■										
Standard (STD), 1,790 mm									●					■	■	■	
Standard (STD), 2,000 mm	■																
Standard (STD), 2,090 mm									●					■	■		
Standard (STD), 2,490 mm									●					○			
Standard (STD), 2,890 mm									●	■	■	■	■				
Standard (STD), 2,900 mm	■																
Standard (STD), 2,920 mm								■									
Standard (STD), 3,200 mm	■																
Standard (STD), 3,220 mm																	
Standard (STD), 3,290 mm									●								
Standard (STD), 3,590 mm									●	■	■	■					
Standard (STD), 3,600 mm	■																
Standard (STD), 3,620 mm	■																

■ Standard
■ Option

○ only for BDL13S-7
● residual capacities at full height: see specification sheet

Description

MASTS

- Full Free (FF), 2,890 mm
- Full Free (FF), 3,220 mm
- Full Free (FF), 3,590 mm
- Full Free (FF), 3,620 mm
- Full Free Triple (FFT), 4,020 mm
- Full Free Triple (FFT), 4,190 mm
- Full Free Triple (FFT), 4,320 mm
- Full Free Triple (FFT), 4,390 mm
- Full Free Triple (FFT), 4,620 mm
- Full Free Triple (FFT), 4,790 mm
- Full Free Triple (FFT), 5,320 mm
- Full Free Triple (FFT), 5,390 mm
- Full Free Triple (FFT), 5,520 mm

COLD STORE

- Cold store version (down to -30°C)
- Special frame coating
- Final painting
- Stainless steel axles and bolts
- Greasable cross-bearings with special lubricant (down to -30°C)
- Special hydraulic oil (down to -30°C)
- Magnetic brake heating system

- Standard
- Option




Cold Store

For most DLE machines, there is a cold store version available, equipped to work properly in environments down to -30° C.

Pallet Trucks						Stackers						Double Stackers			Order Pickers	
LPM15/20N-7	BPL18/20S-7	BPM20S-7	BPR20S-7	BPM40/50S-5	BPW20S-5	LSM12N-7	BSL12/16N-7	BSL10/13S-7C	BSL14/16S-7	BSR16S-7	BSL20S-7	BSW13S-5	BDL13S-7(H)	BDR13S-7	BDW13S-5	BOR20S-5X
							■		■	■						
									■	■						
							■									
									■	■	■					
							■		■	■	■					
									■	■	■					
							☺		■	■	■					
									■		■					
							☺									
						■	■	■	■	■	■		■	■	■	■

☺ only for BSL16N-7

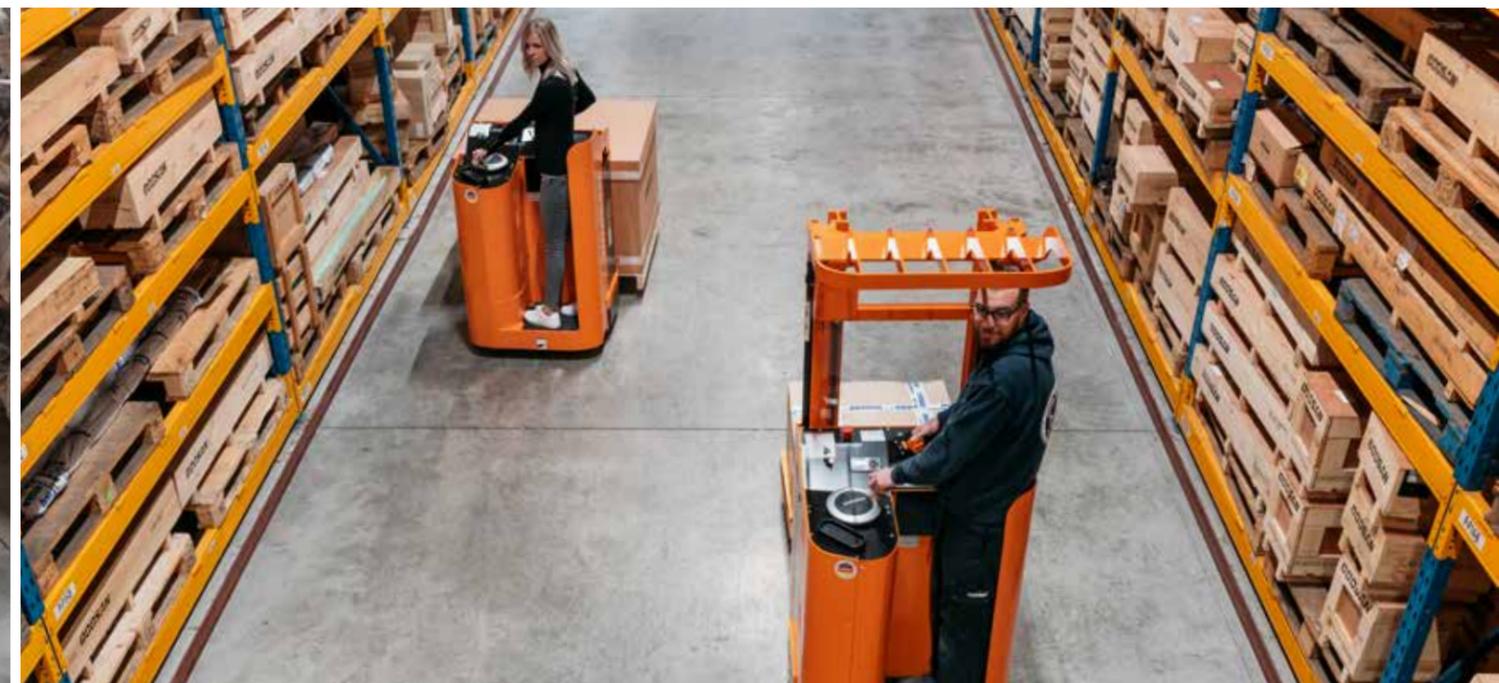

Cargo Handling Solutions

The DONKEY is an electric pallet truck designed for the horizontal transport of unit load devices (ULD's) weighing up to 7,500 kg on slave pallets with a system height of 508 mm. These machines are ideally suited for in-house cargo handling. In connection with slave pallets, our pallet master (DONKEY) is used as a ULD handling-system for flexible operations in large, airport warehouses. It is a carrier between land and air-side.



The DONKEY transports ULD's on all common slave pallet types safely and quickly and covers the whole range of the indoor transport of air cargo pallets.

The biggest advantage when comparing these with other transport systems, is that the Doosan machines offer a much more flexible solution, able to be used in the whole indoor area without the need for expensive, inflexible stationary conveyor equipment.

-  Capacity
-  Lift height
-  Overall width
-  Fork length



LEHF75D (Donkey)

-  7,500 kg
-  477 mm
-  1,858 mm
-  2,400 mm

Reach Trucks

The combination between performance features - such as AC technology and high precision mast design - on the one hand and personal performance settings - such as ergonomic controls and highest level of operator comfort indicators - on the other hand define the Doosan Reach Truck as the machine adapted to your needs whilst deliver the performance you require.



BR14JW-7 / 16JW-7 Plus

Capacity: 1,400 / 1,600 kg
Lift heights up to 9,410 mm
Seated, 48V

Standard Features and Optional Extras

Standard
Option

Low noise and maintenance-free AC motors	Standard
Multi-functional graphical display provides truck status data and dynamic information	Standard
Pre-selection for performance settings	Standard
180°/360° steering options	Standard
Integral side-shift	Standard
High stability mast with excellent visibility	Standard

Camera system	Option
Height indicator & height pre-selector	Option
Battery roll in/roll out	Option
Rear view mirror	Option

Great Serviceability

Worldwide service network

- Head quarter
- Overseas offices and service centers



Doosan provides high-quality support, relying on its extensive dealer network. No matter where you are located, highly-skilled professionals are always ready to help you, guaranteeing maximum uptime.

Doosan genuine parts

The parts warehouse supplies high quality Doosan parts to your local dealer.



Technical Specifications

MAJOR SPECIFICATIONS	Base capacity kg	Fork length mm	Overall width mm	Forks lowered height mm	Turning radius mm	Lift height mm	Battery capacity Ah (Voltage)
PALLET TRUCKS							
LPM15N-7	1,500	1,150	540	80	1,330	115	20-30 (24V)
LPM20N-7	2,000	1,150	540	80	1,336	115	20 (48V)
BPL18S-7	1,800	1,195	660	85	1,476	120	160-250 (24V)
BPL20S-7	2,000	1,195	660	85	1,476	120	160-250 (24V)
BPM20S-7	2,000	1,195	660	85	1,497	120	160-250 (24V)
BPR20S-7	2,000	1,150	700	85	1,705	120	345-375 (24V)
BPM40S-5	4,000	1,190	690	90	1,630	120	360 (24V)
BPM50S-5	5,000	1,190	690	90	1,630	120	360 (24V)
BPW20S-5	2,000	1,190	800	85	1,780	120	620 (24V)
STACKERS							
Economy Line							
LSM12N-7	1,200	1,150	800	86	1,350	1,930-2,280	60 (24V)
BSL12N-7	1,200	1,150	820	90	1,440	1,958-2,108	172-200 (24V)
BSL16N-7	1,600	1,150	820	90	1,510	1,958-2,408	258-300 (24V)
Compact Line							
BSL10S-7C	1,000	1,195	660	90	1,481	1,790-3,590	160-250 (24V)
BSL13S-7C	1,250	1,195	660	90	1,481	1,790-3,590	160-250 (24V)
Heavy Line							
BSL14S-7	1,400	1,195	790	90	1,490	2,890-5,390	230-375 (24V)
BSL16S-7	1,600	1,195	790	90	1,490	2,890-5,390	230-375 (24V)
BDR16S-7	1,600	1,195	880	90	1,805	2,890-5,390	345-375 (24V)
BSL20S-7	2,000	1,195	790	90	1,580	2,890-5,390	345-375 (24V)
BSW13S-5	1,250	1,195	800	90	1,688	2,890	620 (24V)
Double Stackers							
BDL13S-7	1,800	1,195	660	90	1,670	690-2,490	160-250 (24V)
BDL13S-7H	2,000	1,195	660	90	1,670	1,790-2,090	160-250 (24V)
BDR13S-7	2,000	1,195	700	90	1,900	1,790-2,090	345-375 (24V)
BDW13S-5	2,000	1,195	800	90	1,899	1,790	620 (24V)
ORDER PICKERS							
BOR20S-5X	2,000	2,350	765	90	2,951	700	345-375 (24V)
CARGO HANDLING SOLUTIONS							
LEHF75D	7,500	2,400	1,858	115	3,185	477	620 (48V)

MAJOR SPECIFICATIONS	Base capacity kg	Load center mm	Overall length mm	Overall width mm	Overhead guard height mm	Turning radius mm	Lift height mm	Battery Capacity Ah (Voltage)
REACH TRUCKS								
BR14JW-7 Plus	1,400	600	2,398-2,533	1,268/1,270	2,185	1,661	5,000-9,410	420-700 (48V)
BR16JW-7 Plus	1,600	600	2,398-2,533	1,268/1,270	2,185	1,708	5,000-9,410	420-700 (48V)



-  Production Subsidiary
-  Sales Subsidiary
-  Parts Depot Center

PSDLE210224V8EN (February 2021)



Doosan Industrial Vehicle Europe nv

Europark-Noord 36A
9100 Sint-Niklaas
Belgium

Tel.: +32 3 760 09 87
Fax: +32 3 760 09 89
Website : www.doosan-iv.eu

Authorized Dealer